

### ME162 Single-Phase Meter Direct Connected (100 AMP)

## OFGEM Approved

### Introduction

The ME162 single-phase electronic meters are intended for electric energy measurement and registration in single-phase two-wire networks in household. The meter is approved and manufactured in compliance with the IEC 62052-11, IEC 62053-21 (IEC 61036) standards and ISO 9001. They are designed according to even more severe internal standards that are the result of our more than 50-year experiences of meter manufacturing and fifty million meters installed worldwide.



Active Power



Single or Double Direction



Multi-Rate Registration  
Programmable External Time Switch



Internal Clock



Data Display



Impulse Output (kWh)

- Internal clock
- Data display on LCD in voltage-free state (option)
- LCD backlight (option)
- Communication optical port for semi-automatic meter reading
- Smaller dimensions
- Energy measurement: one direction, double direction or absolute

# Functional and Technical Data

ME162 is a single-phase meter for residential and small commercial users, for revenue measuring of active power in two wire systems.

### Measuring and Registration:

Standard (as a mechanical meter)

- Other Options:
- Double direction
  - Always positive (absolute)

**Accuracy/Calibration:** Due to the long-term stability there is no need for recalibration in meters life-time.

### Indications:

- LED1 (red): kWh impulses (k=1000 imp/kWh)
- Illuminated: Meter is powered, no load current.
- Pulsating: Load current is higher than starting value.
- Not Illuminated: Meter is not powered.

**Communication:** Opto-port (IEC 62056-21): for local meter reading and programming.

### Real time clock:

- 32 kHz quartz oscillator
- The real time clock generates: a tariff program, season changeover, transition to day light saving period and vice-versa.

**Inputs – Tariff:** Two tariff inputs for 2-4 tariff energy registration.

**Outputs:** S0 (DIN 43864) or opto-MOS-relay.

Option: Two separate S0 or optomos outputs for bi-directional energy flow direction (kWh - import, kWh - export).

### Local metering data display (LCD):

- Automatic scroll mode
- Manual scroll (by button)
- Programmable data set and sequence
- LCD back-light (option)
- Data display on LCD in voltage-free state (option).

### Scroll key:

- LCD test
- Scrolling data on LCD

**Enclosure:** Polycarbonate, Self-extinguishable;


**Protection against water and dust:** IP 53

**It is essential that any electricity meter is installed by a competent and qualified electrician. The meter must be fitted in full compliance to the regulations concerning electricity meters.**


**When removing a meter from the supply it is essential that the meter is fully isolated from the mains, both voltage and current circuits must be isolated.**

<b>Accuracy Class</b>	<b>2 or 1</b>
<b>Rated Current In</b>	<b>5, 10, 20 A</b>
<b>Max Current I<sub>max</sub></b>	<b>85, 100 A</b>
<b>Min Current</b>	<b>0.05 In</b>
<b>Starting Current</b>	<b>0.004 I<sub>b</sub></b>
<b>Reference Voltage U<sub>n</sub></b>	<b>120, 220, 230, 240 V</b>
<b>Voltage Range</b>	<b>0.8 U<sub>n</sub> &gt; 1.15 U<sub>n</sub></b>
<b>Reference Frequency</b>	<b>50, 60 Hz</b>
<b>Meter Constant</b>	<b>1000 imp/kWh</b>
<b>Clock Accuracy (25°C)</b>	<b>≤ 6 ppm or ≤ ± 3 min/year</b>
<b>RTC Control</b>	<b>32 kHz crystal</b>
<b>Operating Temp. Range</b>	<b>-25°C &gt; +60°C</b>
<b>Extended Temp. Range</b>	<b>-40°C &gt; +70°C</b>
<b>Storage Temperature</b>	<b>-40°C &gt; +85°C</b>
<b>Current Circuit Burden</b>	<b>&lt;25 mW / 25 mA</b>
<b>Voltage Circuit Burden</b>	<b>&lt;0.8 W / 10 VA</b>
<b>Dielectric Strength (burst test)</b>	<b>4 kV, 50 Hz, 1 min</b>
<b>Impulse Voltage</b>	<b>6 kV, 1.2/50 μs</b>
<b>Short Circuit Current</b>	<b>30 I<sub>max</sub></b>
<b>EMC: High Frequency Disturbances</b>	<b>6 kV (IEC 1000-4-4)</b>
<b>Optical Port</b>	<b>IEC62056-21 (IEC 61107)</b>
<b>Impulse Outputs:</b>	
<b>S0</b>	<b>t<sub>i</sub> = 40 ms (10, 20, 30...160 ms)</b>
<b>opto-MOS</b>	<b>t<sub>i</sub> = 80 ms (10, 20, 30...160 ms)</b>
<b>Switching power</b>	<b>25 VA (100 mA, 250 V)</b>
<b>OPTOMOS VOLT FREE PULSE OUTPUT PROGRAMMABLE</b>	
<b>Dimensions</b>	<b>97 x 130 x 43 mm</b>
<b>Mass</b>	<b>Approx 0.380 kg</b>

# Connection Diagram

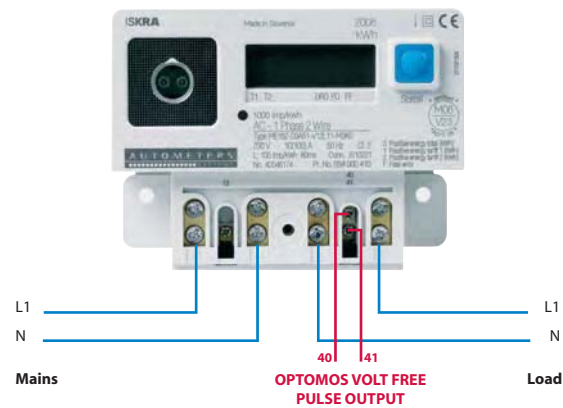

# Casing Dimensions

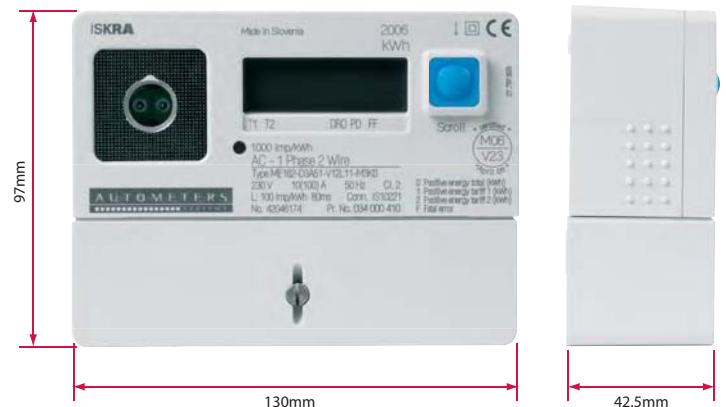

**Autometers Systems Limited,**  
4B Albany Road,  
Chorlton-cum-Hardy,  
Manchester.  
M21 0AW

**Tel:** +44 (0) 161 861 9056  
**Fax:** +44 (0) 161 881 3745  
**www.autometers.co.uk**  
**Email:** sales@autometers.co.uk

Product development is continuous and Autometers Systems Ltd reserves the right to make alterations and manufacture without notice. Products as delivered may therefore differ from the descriptions and illustrations in this publication.